



Palm m500 Back Panel Replacement

This guide will detail how to disassemble the backplate.

Written By: Alex Haggblade



INTRODUCTION

Before you begin disassembly, be sure to have the necessary tool. You will need a Torx size T6 screwdriver. You will be removing the stylus in order to take off the back panel.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Panel




- Remove the stylus from the side of the PDA by sliding it upwards.

Step 2



- Remove the 4 screws from the corners of the back panel of the device using a size T6 Torx screwdriver.
- ⓘ Place screws in a plastic bag or another safe place.

Step 3

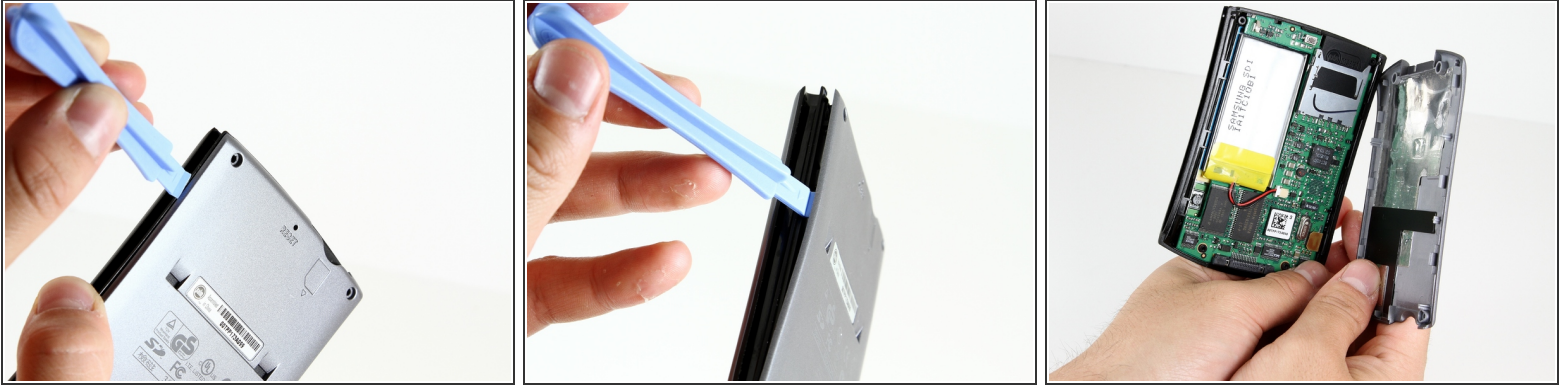

- Insert the edge of the plastic opening tool between the back panel and the black stylus holder.
- Carefully and forcefully pry the panels apart.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 03:16:56 PM.